


6x28 NB™ PRODUCT DATA SHEET



Liqui-Cel®



Membrane Contactors

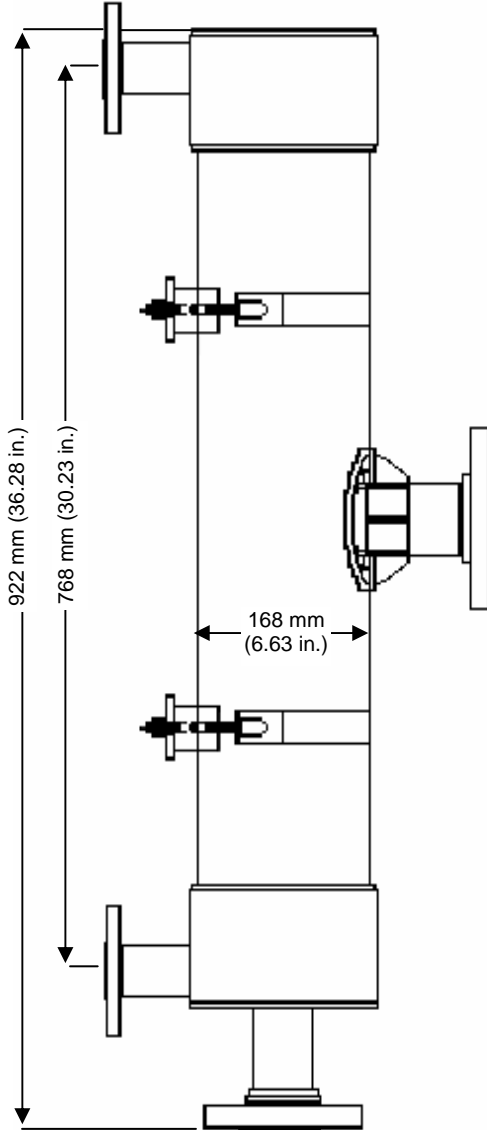

Cartridge Characteristics	
Cartridge Configuration	No Baffle
Liquid Flow Guidelines (one cartridge)	1-11 m ³ /hr (5-50 gpm)
Membrane	X40 Fiber
Porosity	~ 25%
OD / ID	300 / 200 micron
Membrane/Potting Material	Polypropylene / Epoxy
Typical Membrane Surface Area	42 m ² (452 ft ²)
Maximum Shellside Working Temperature/Pressure <i>[Using 50 mm vacuum on Lumenside. Add 1.05 kg/cm² (15 psig) when vacuum is not used.]</i>	60°C, 2.1 kg/cm ² 25°C, 7.38 kg/cm ² (140°F, 30 psig) (77°F, 105 psig)
Priming Volume	Shellside 6.2 liters (1.6 gal.) Lumenside 2.3 liters (0.6 gal.)
Housing Characteristics	
Material	ABS
Flange Connections	
Shellside (Wetted surface)	<ul style="list-style-type: none"> 2 inch class 150 raised face flange per ANSI B16.5 50A at 10K flat face flange per JIS B2238
Lumenside	<ul style="list-style-type: none"> 1 inch class 150 raised face flange per ANSI B16.5 25A at 10K flat face flange per JIS B2238
Weight	
Dry	10.4 kg. (23 lbs.)
Liquid full (shellside)	16.6 kg. (36.6 lbs.)
Shipping weight without mounting kit	16.8 kg. (37 lbs.)
Shipping weight with mounting kit	19.1 kg. (42 lbs.)

NOTE: All dimensions are nominal values. Clamps are sold separately in mounting kit.

All components of the 6x28 Liqui-Cel® Membrane Contactor, when used in accordance with recommendations given in our product literature for treatment or processing of water, non-alcoholic beverages, and aqueous, acid and non-acid food products at and below ambient temperatures, are in compliance with all relevant FDA regulations as specified in Title 21 of the Code of Federal regulations.

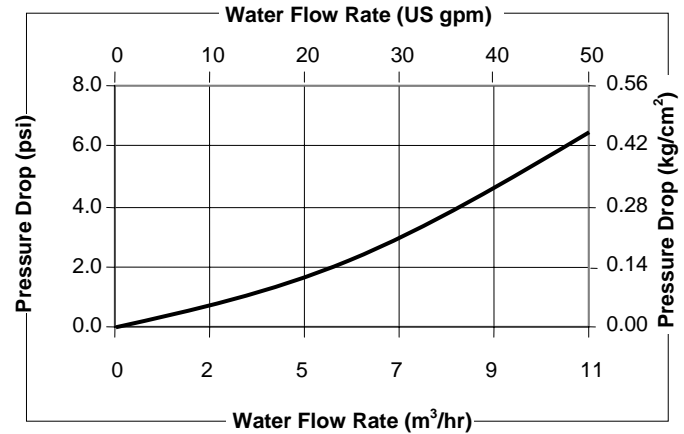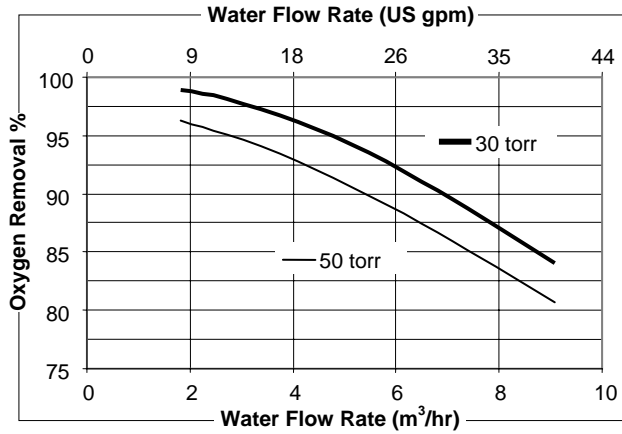

Curves represent nominal values, generated using water at 25°C. Characteristics may change under different operating conditions.

Cartridge Specifications		
Characteristics	Test Conditions	Specifications
Performance O ₂ Removal	Shellside water flow: 27gpm, 20°C (68°F) Lumenside N ₂ Flow: 1scfm	83.9% minimum
Pressure Drop	Shellside water flow: 27 gpm, 20°C (68°F)	3.04 psi maximum

This product is to be used only by persons familiar with its use. It must be maintained within the stated limitations. All sales are subject to Seller's terms and conditions. Purchaser assumes all responsibility for the suitability and fitness for use as well as for the protection of the environment and for health and safety involving this product. Seller reserves the right to modify this document without prior notice. Check with your representative to verify the latest update. To the best of our knowledge the information contained herein is accurate. However, neither Seller nor any of its affiliates assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of the suitability of any material and whether there is any infringement of patents, trademarks, or copyrights is the sole responsibility of the user. Users of any substance should satisfy themselves by independent investigation that the material can be used safely. We may have described certain hazards, but we cannot guarantee that these are the only hazards that exist.

Liqui-Cel, Celgard, SuperPhobic and MiniModule are registered trademarks and NB is a trademark of Membrana-Charlotte, A division of Celgard, LLC and nothing herein shall be construed as a recommendation or license to use any information that conflicts with any patent, trademark or copyright of Seller or others.

©2005 Membrana – Charlotte A Division of Celgard, LLC

(D66__Rev.10_03/06)



ISO 9001:2000
ISO 14001:2004

Membrana - Charlotte
A Division of Celgard, LLC
13800 South Lakes Drive
Charlotte, North Carolina 28273
USA
Phone: (704) 587 8888
Fax: (704) 587 8585

Membrana GmbH
Oehder Strasse 28
42289 Wuppertal
Germany
Phone: +49 202 6099 -593
Phone: +49 202 6099 -224
Fax: +49 202 6099 -750

Japan Office
Shinjuku Mitsui Building, 27F
1-1, Nishishinjuku 2-chome
Shinjuku-ku, Tokyo 163-0427
Japan
Phone: 81 3 5324 3361
Fax: 81 3 5324 3369

MEMBRANA
Underlining Performance

www.membrana.com
www.liqui-cel.com

A **POLYPOR** Company